



Product features

LED

light drive in one, independent research and development, high reliability, mini LED device, industry leading

High transmittance

The transmittance is more than 90%, which does not affect the glass daylighting

Easy to install

without steel structure, just stick the thin screen slightly and connect the power signal

AB version

Flexible

for any surface

Light and thin

as thin as 2.5mm, as light as 5kg/m²

UV resistance

5~10 years can ensure no yellowing

Flame retardant

flame retardant grade V1

Product parameter table

REM - P15

| | | | |
|-----------------------|--------------------|-----------------------|--|
| Module size (mm) | 990*390 | Peak power | 600w/ m ² |
| LED light | REE2022 | Average power | 200w/ m ² |
| Pixel composition | R1G1B1 | Work environment | Temperature - 20~55 Humidity 10-90% |
| Pixel spacing (mm) | 15*15 | Weight | 1.3kg |
| Module pixel | 66*26=1716 | Thickness | 2.5mm |
| Pixel/ m ² | 4356 | Drive mode | static state |
| Brightness | 2000/4000 | Control system | Nova/Colorlight |
| Permeability | 94% | Typical value of life | 100000H |
| Angle of view ° | 160 | Grayscale level | 16bit |
| Input voltage | AC110-240V50/ 60Hz | Refresh rate | 3840 Hz |

Breakpoint continuation


Stable performance, support two-way Drive drive-in LED,

When a single point of failure, the backup data signal starts automatically, seamless switching, without affecting the display effect.

High reliability


The fault lamp beads should be kept off. If the connection is abnormal (signal, power supply, ground) inside the chip, the lamp beads will be extinguished to avoid the phenomenon of steady on and random flashing.

The lamp bead life is more than 100,000 hours

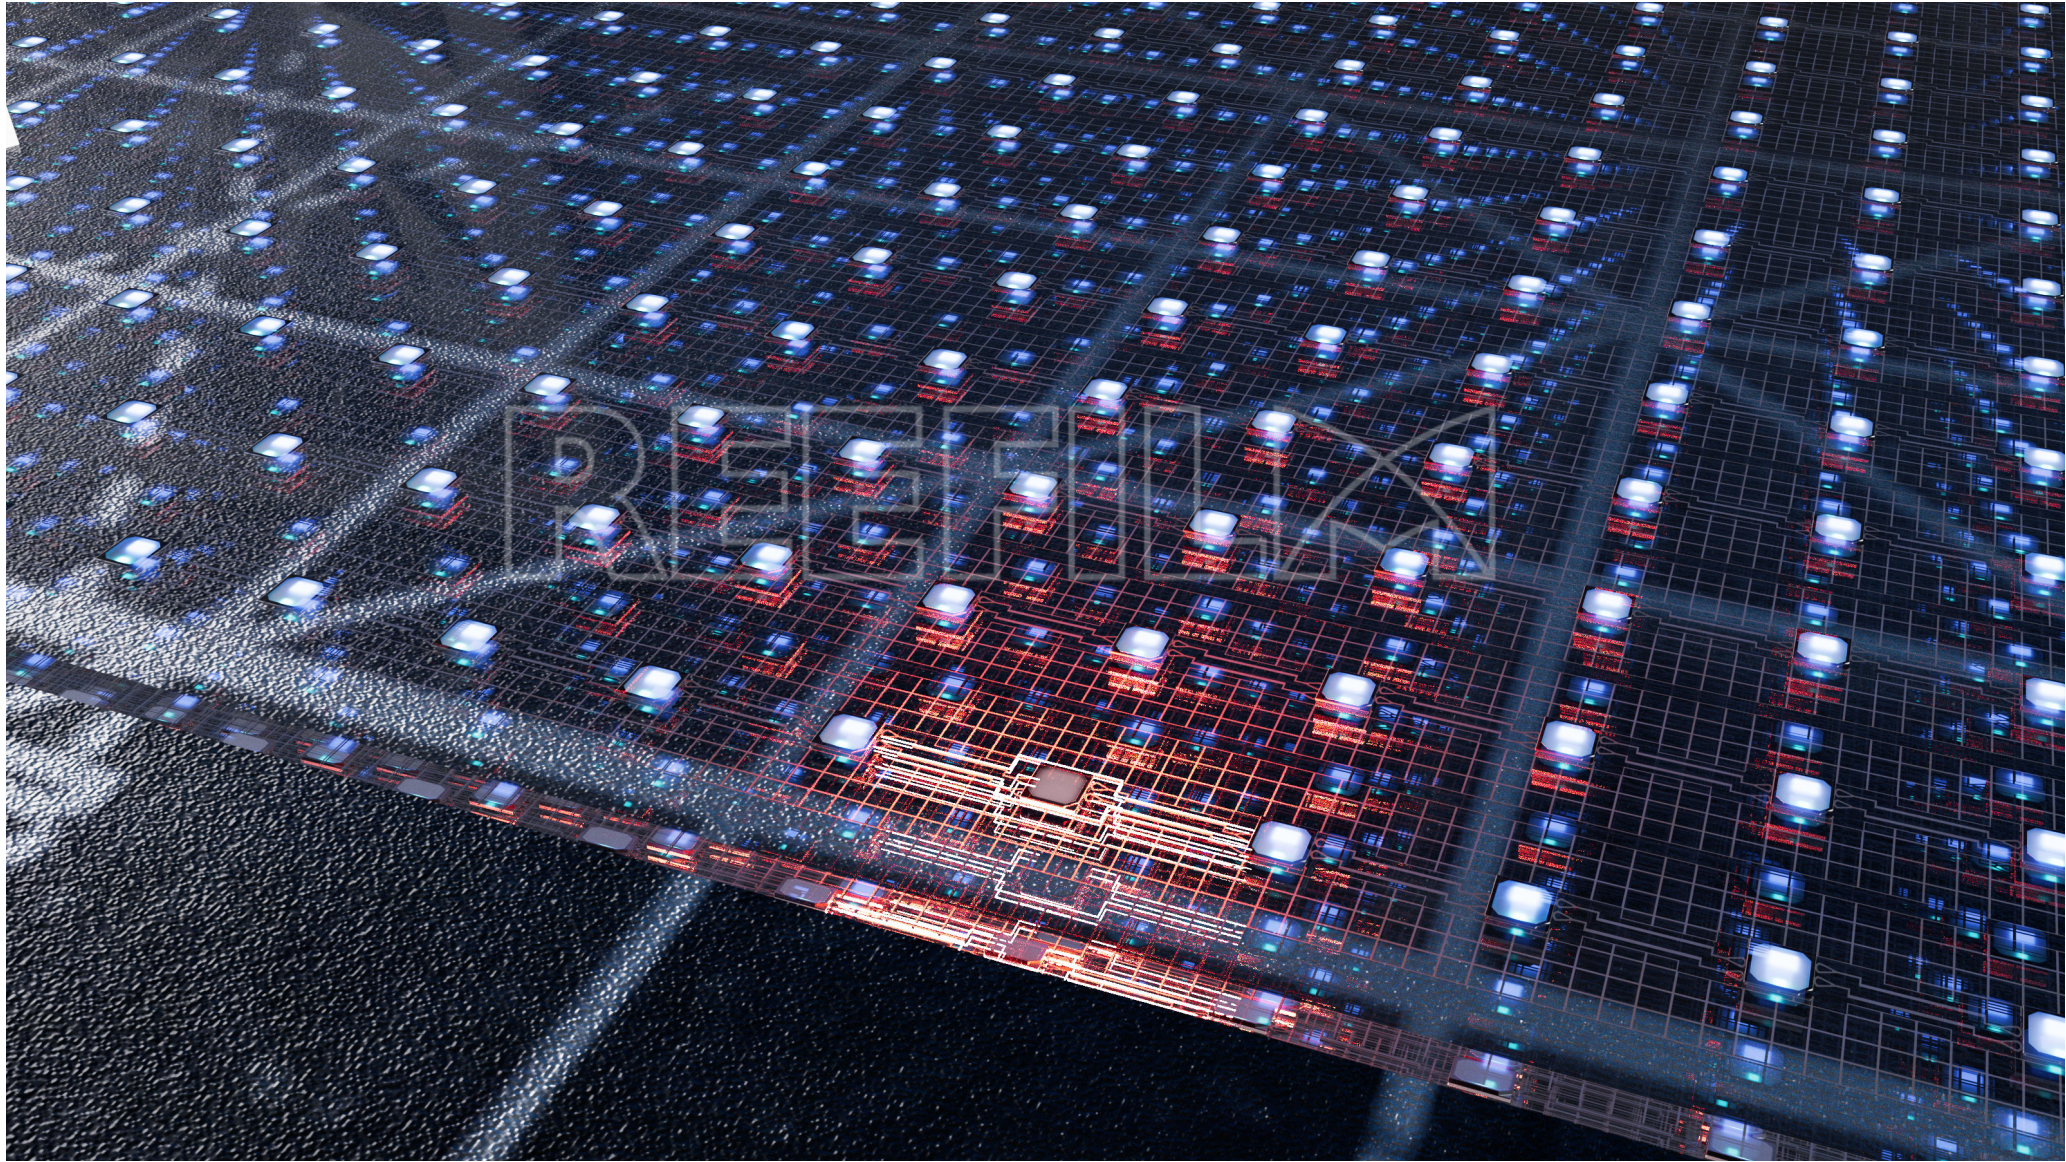



High gray scale display (true 16bit)

RGB channel adopts 32-level current linear regulation, and maintains true 16-bit grayscale display under any current, which is applicable to the consistency of indoor, semi-outdoor and outdoor current requirements;

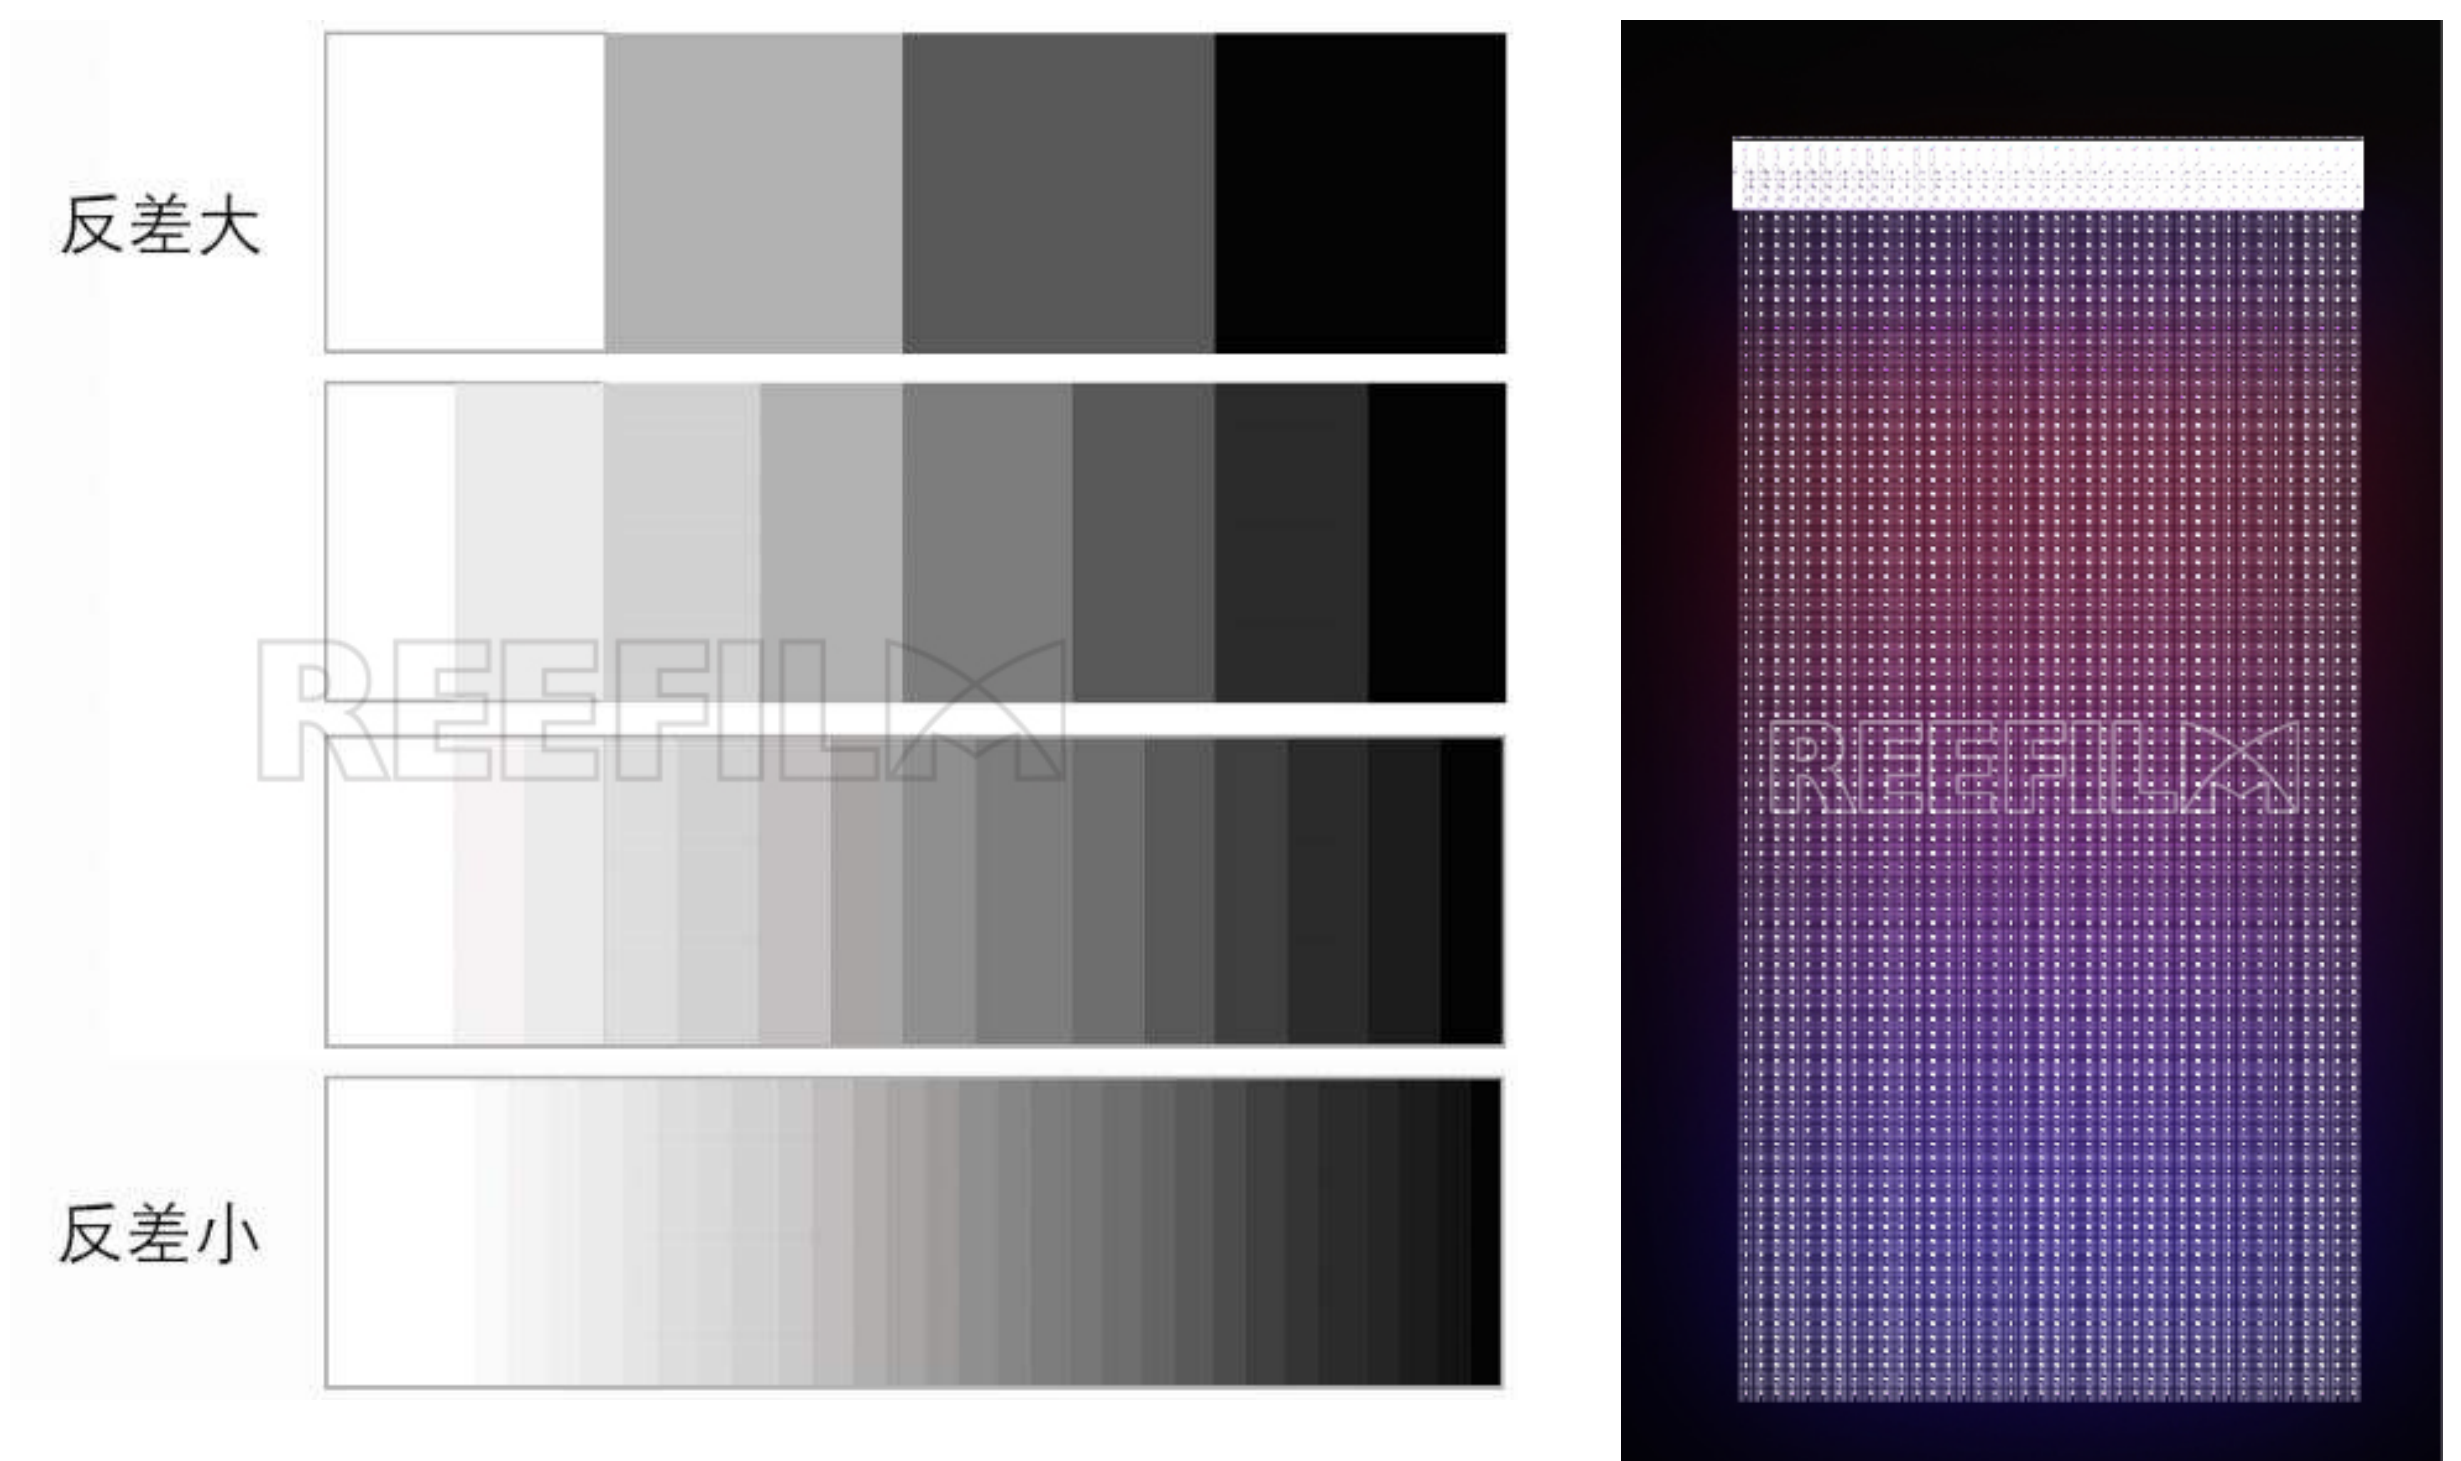


**No steel structure is required,
just stick the thin screen slightly
and connect the power signal**

Self-developed glue filling process (the screen body with its own viscosity can be directly attached to the glass surface, with strong colloid adsorption, and the viscosity will also increase with the passage of time due to the inherent characteristics of the colloid)

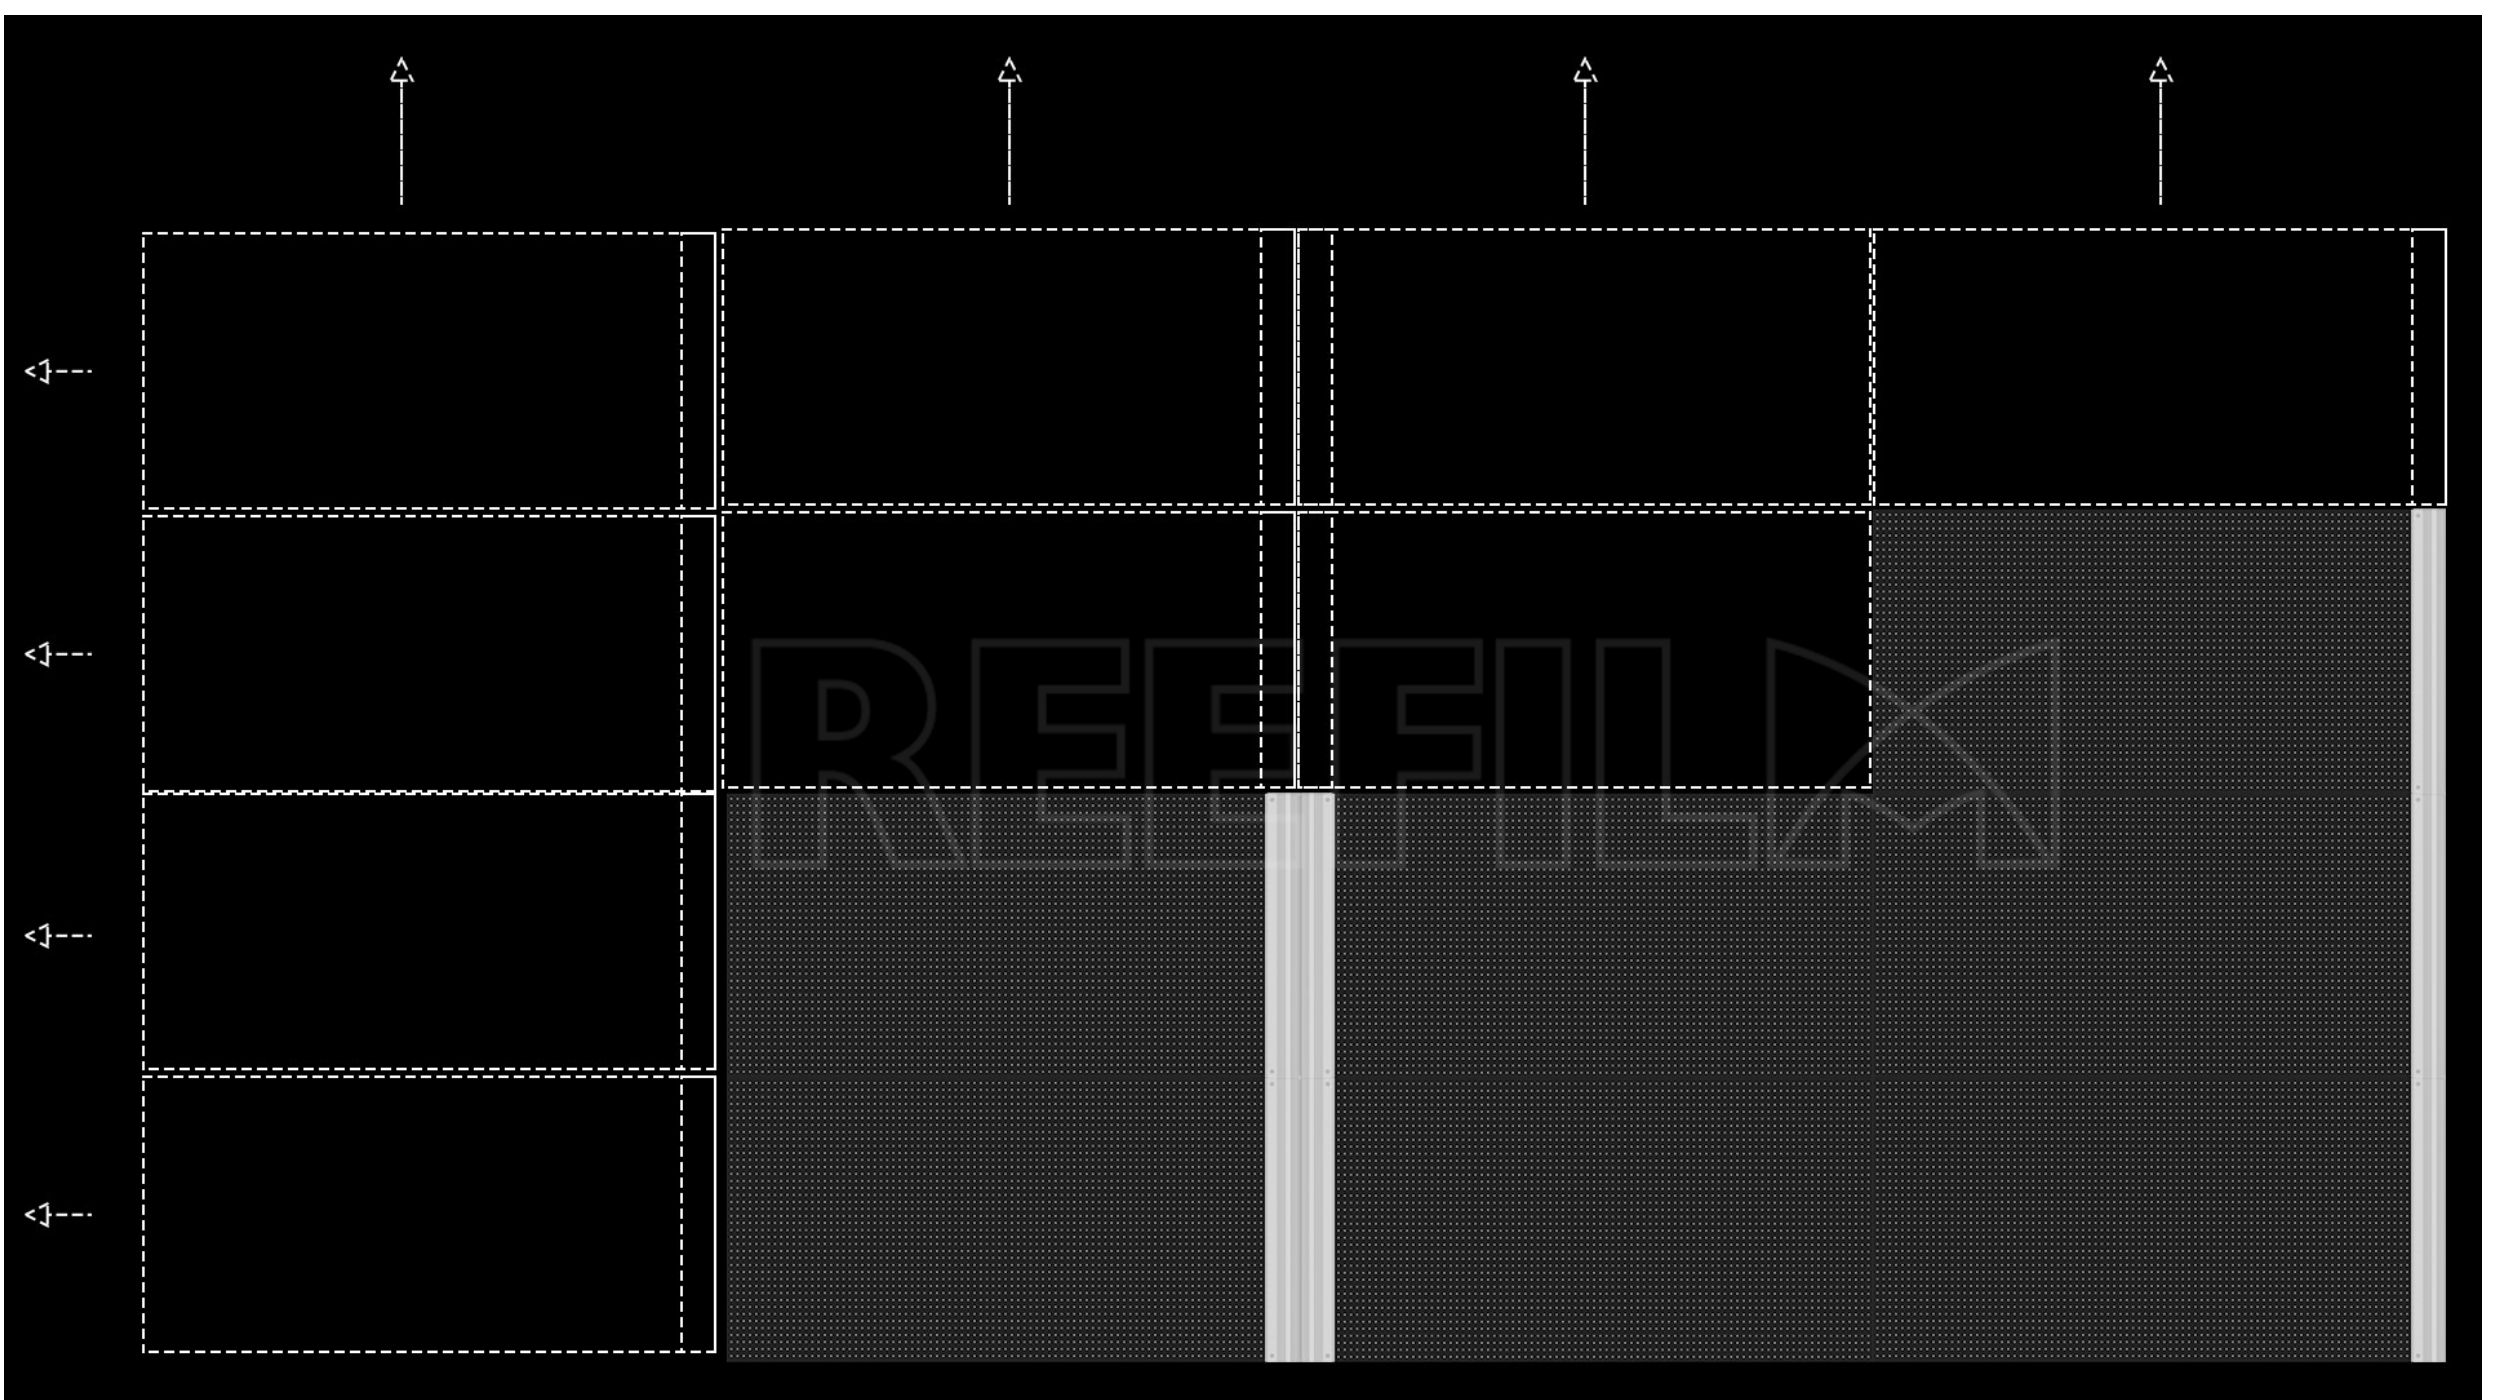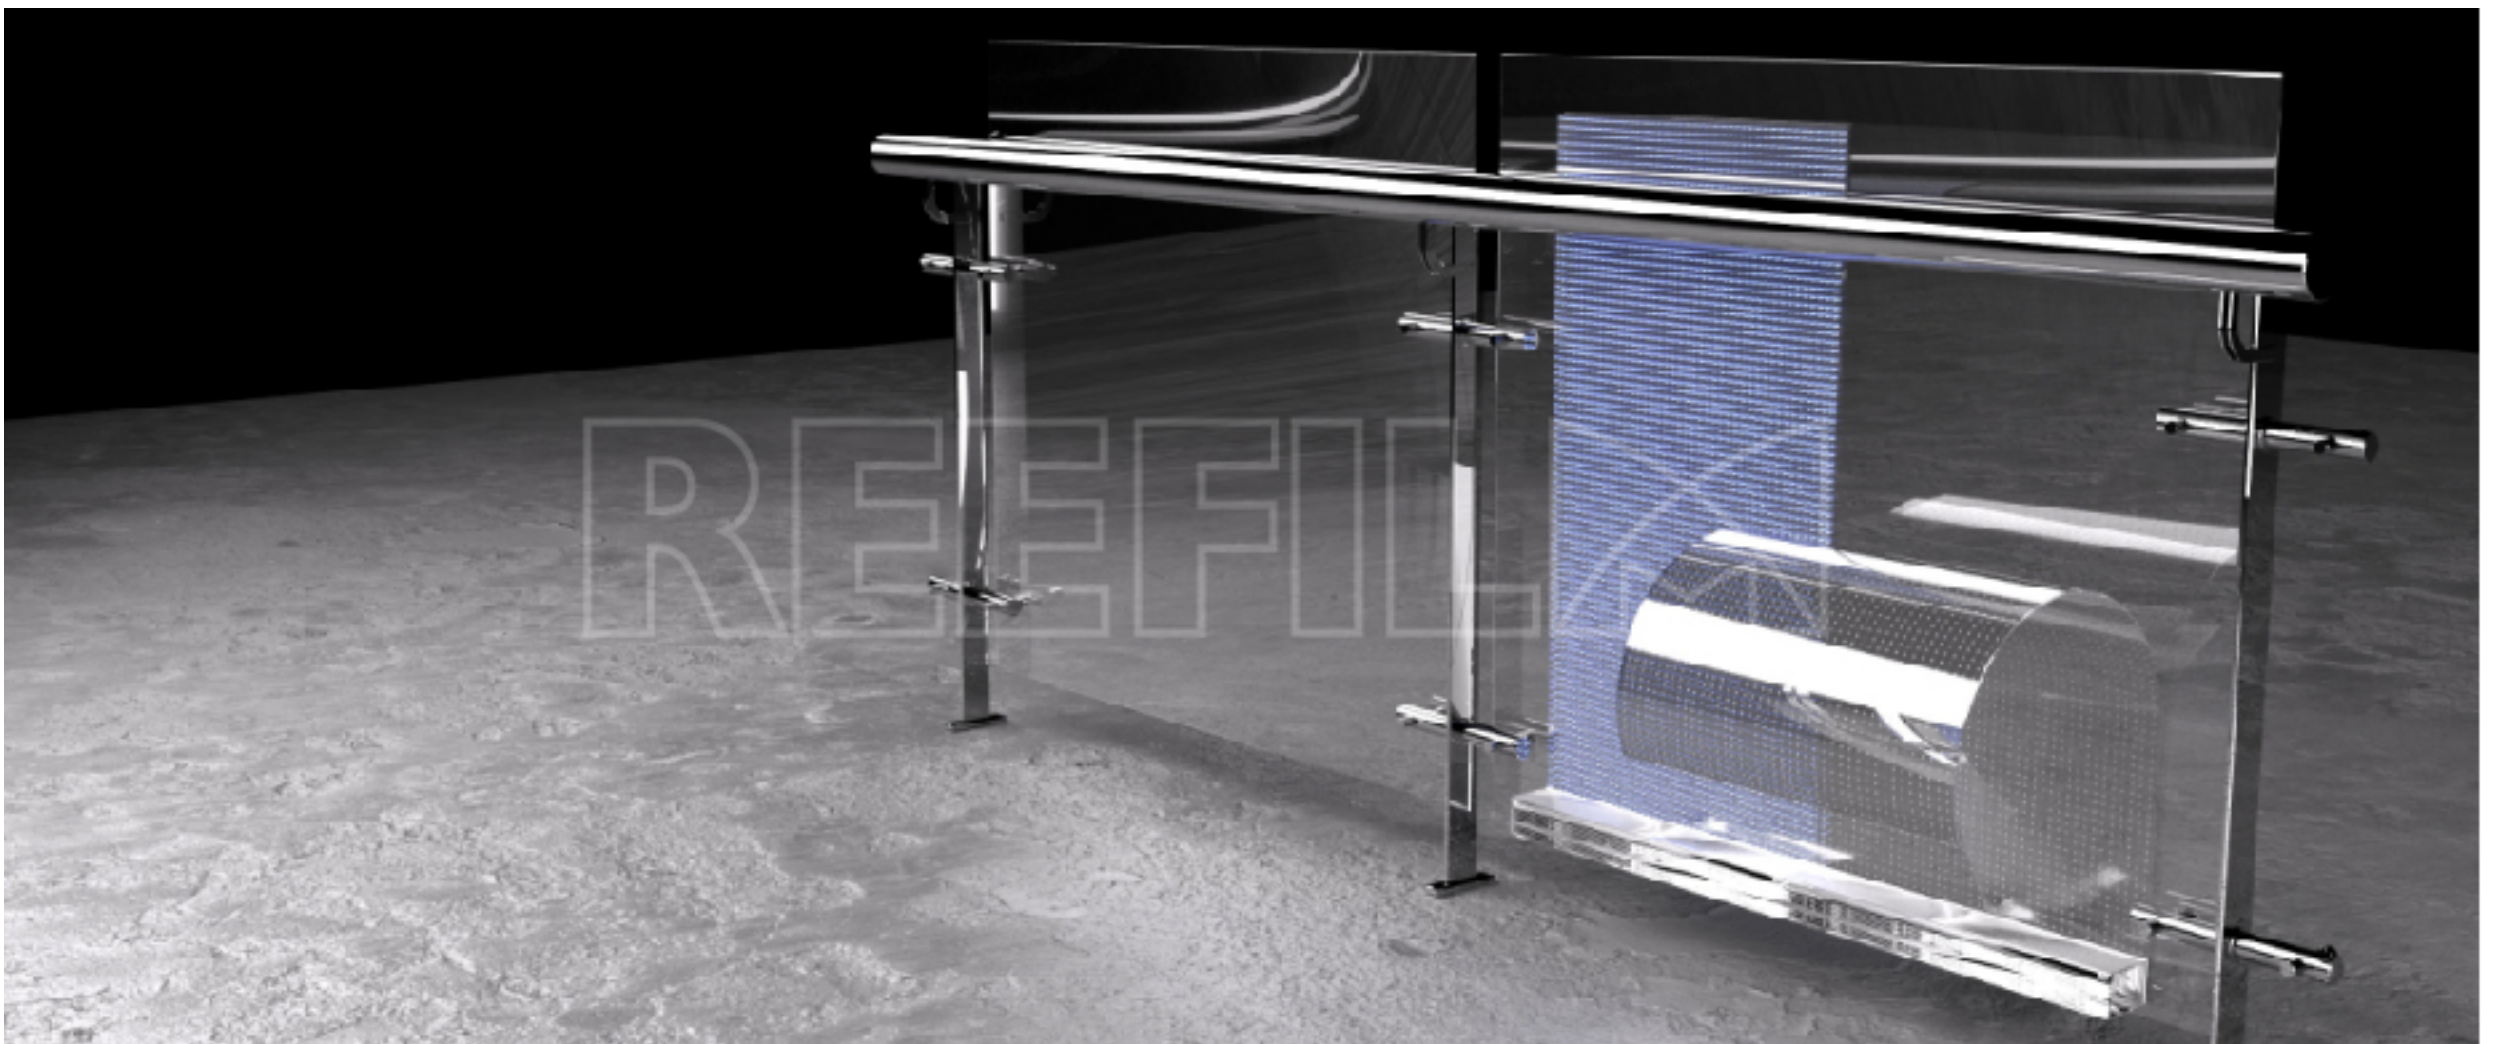

Installation diagram and wiring diagram (same as asynchronous configuration)

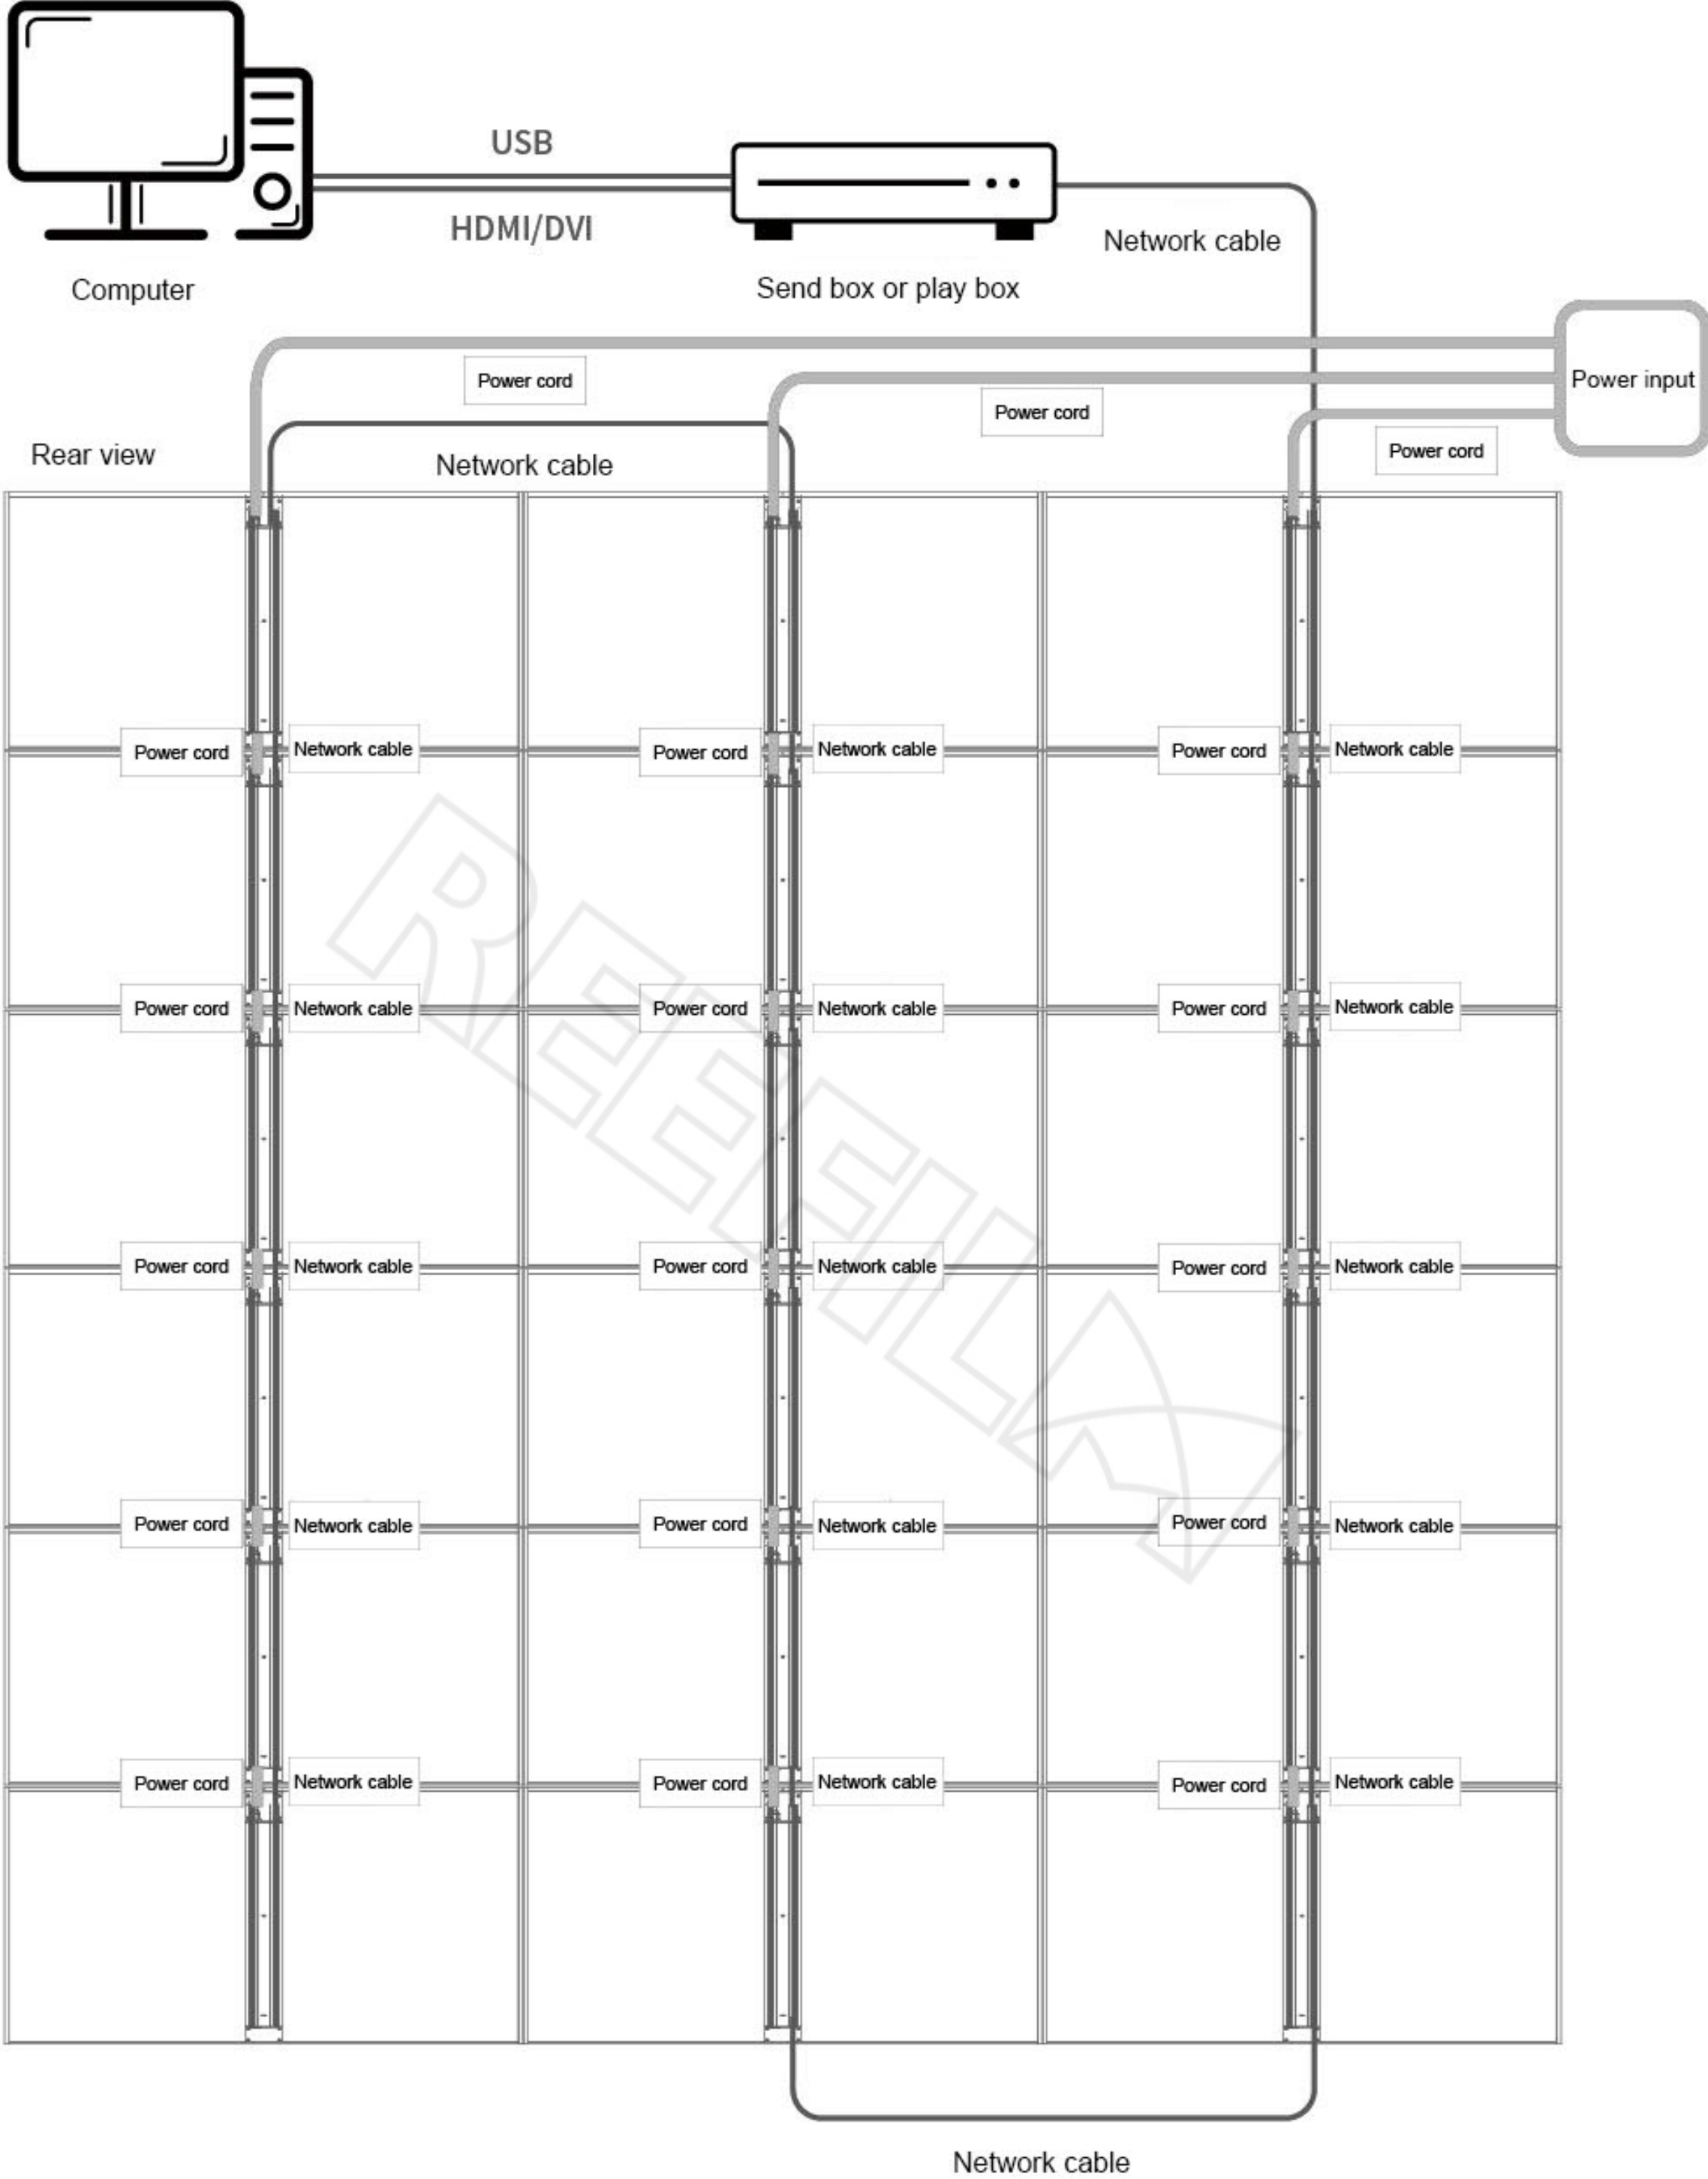


High transmittance

Use the integrated MiniLED lamp beads to improve its own permeability

Use invisible grid circuit to improve its permeability

Patented products

Self-developed chip puts the chip inside the LED beads, simplifying the circuit design and ensuring extremely high permeability.

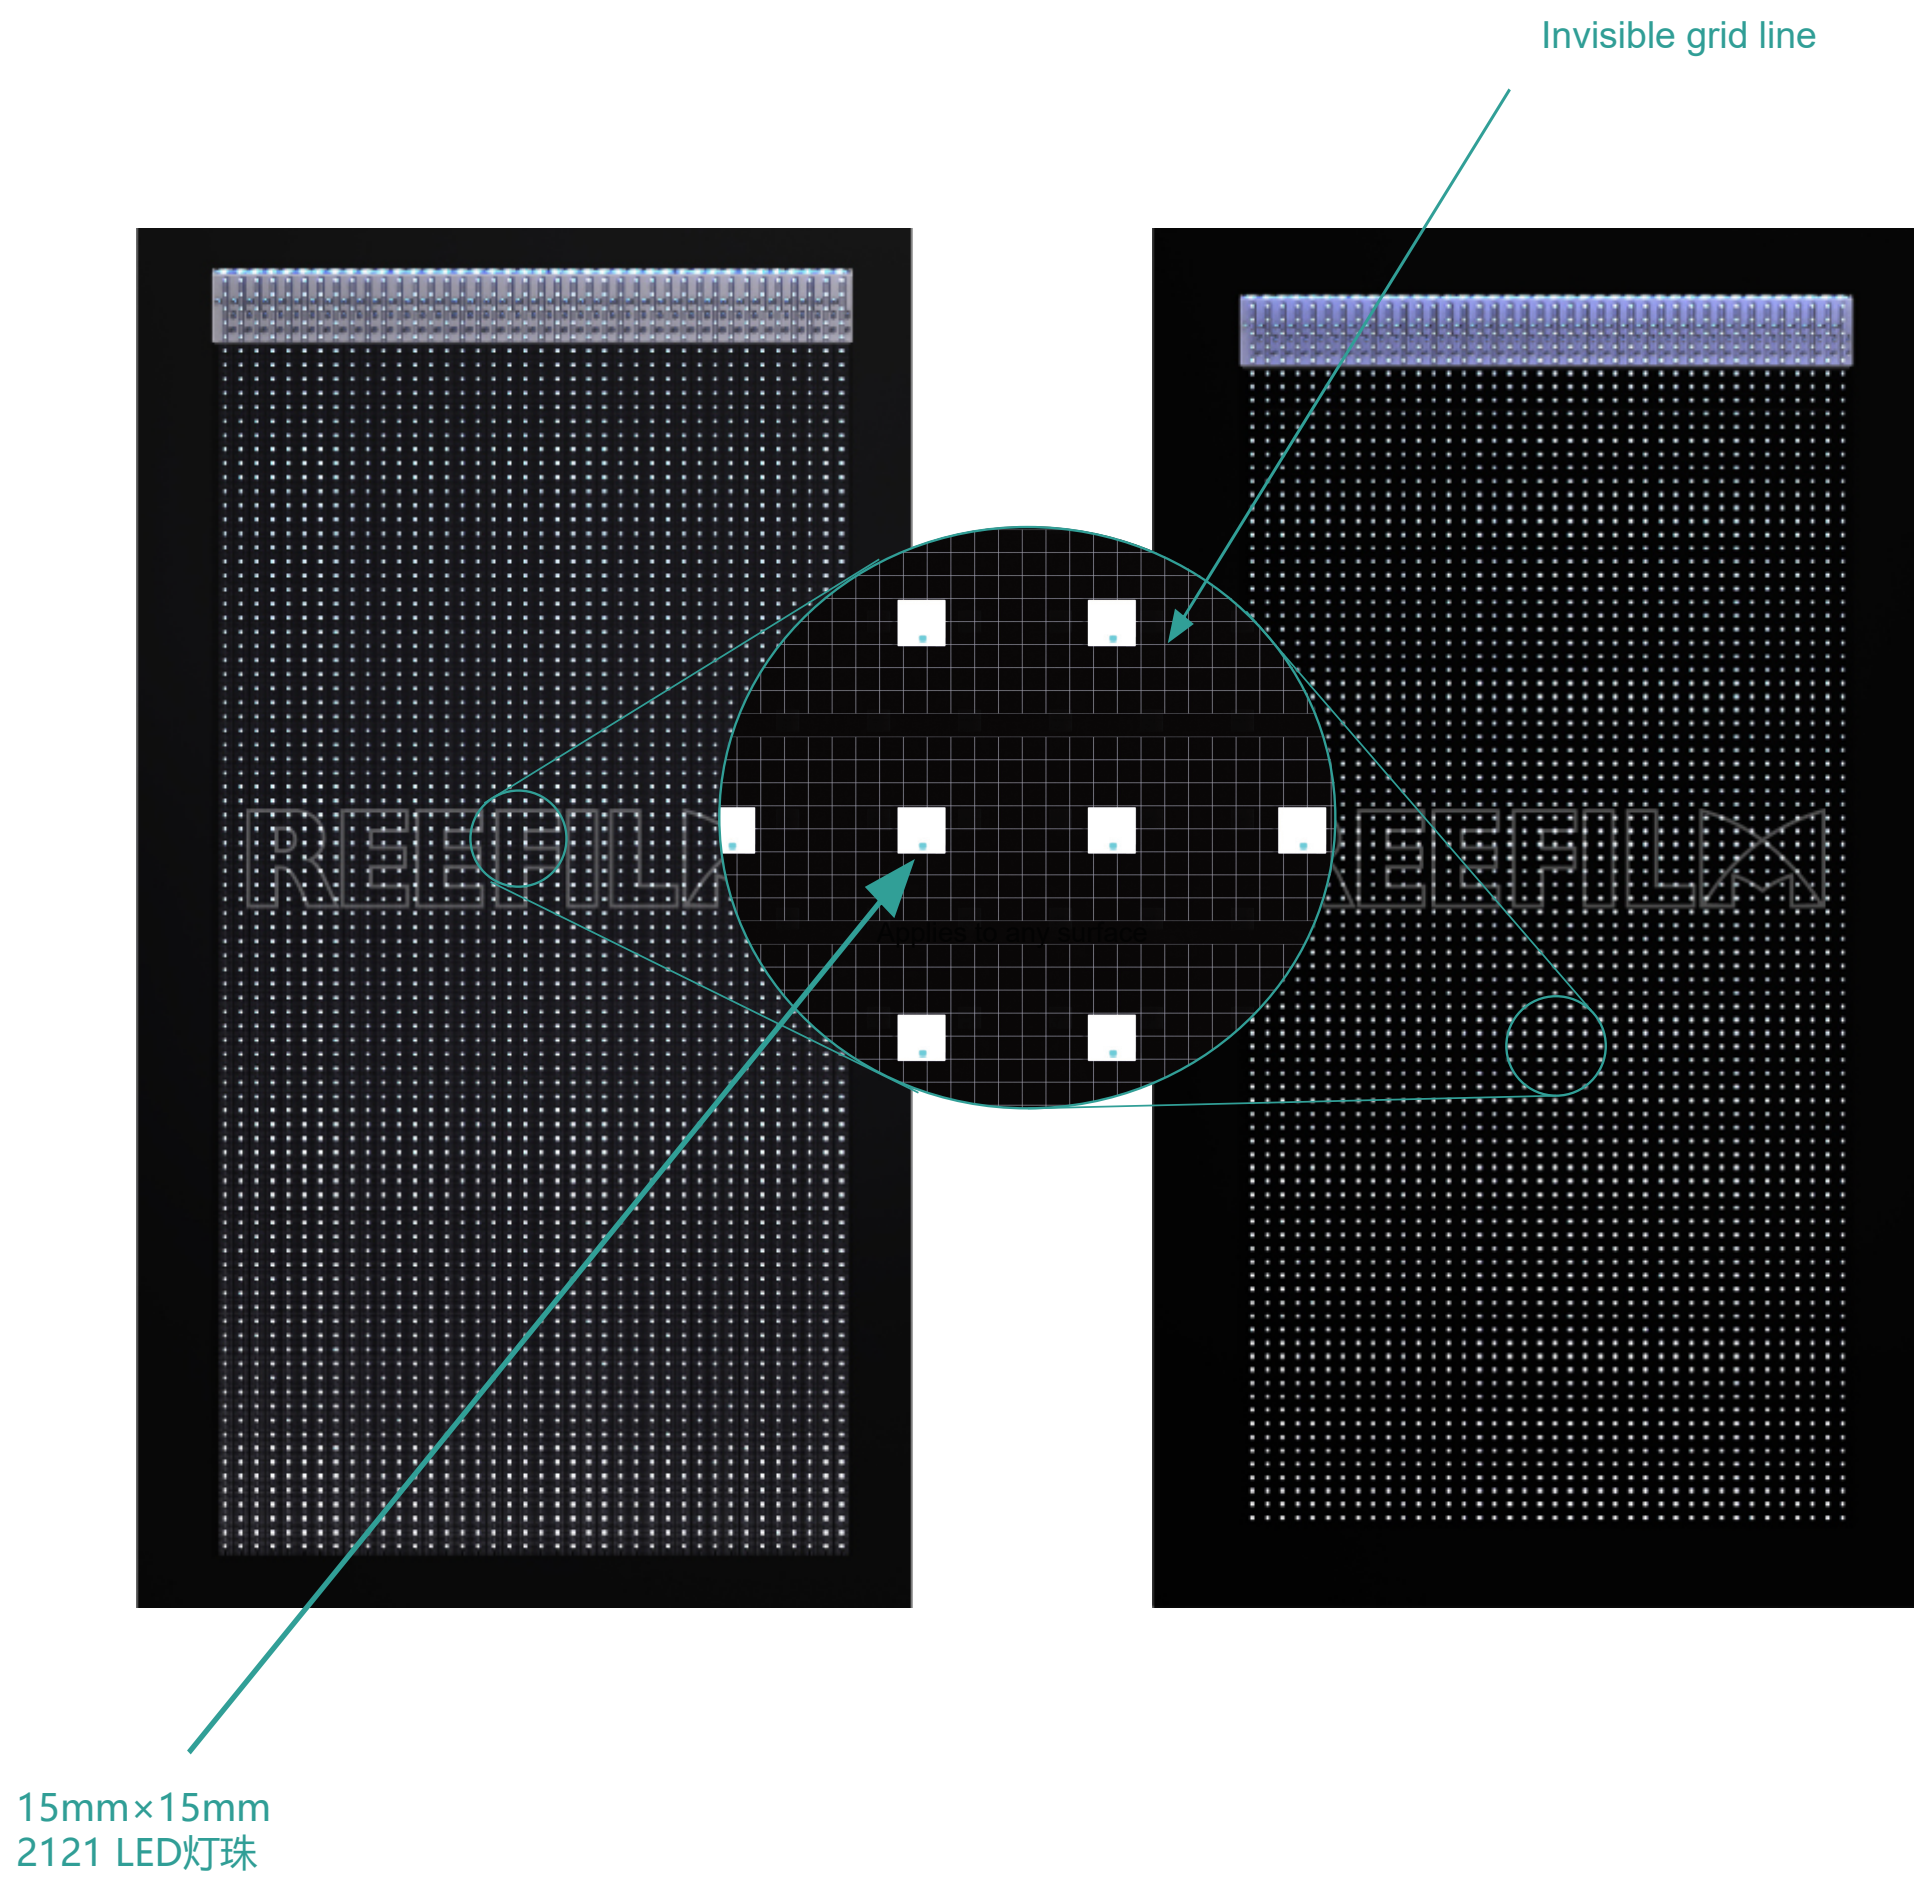

Flexibility

Flexible design: Made of flexible materials, it can be flexibly bent and curved with a minimum diameter of 6cm, adapting to various curved shapes, such as cylindrical, arc, etc. this gives greater flexibility in design and installation.

